

Product leaflet

Product	Model No.	Ordering No.
Protective hood	SR 345	H09-1012
Protective hood	SR 346	H09-1112

Product Description


The protective hoods are designed for use together with Sundström half masks and full face masks with filters or SR 307 compressed air attachment, and with the SR 90 Airline. The hood is made of chemicals-resistant materials and provides protection against splashing and dripping of most solvents and acids in relatively low concentrations. However, the material may be affected by extended contact with certain solvents in liquid form. The hood is extra roomy, so that both a safety helmet and ear protectors can be worn under the hood, if necessary. The SR 345 hood extends over the user's shoulders, back and chest. The SR 346 hood is extended so that it covers the top part of the user's body. The visor is treated to prevent misting. The hood can be machine-washed about 10 times – without spin-drying – at a maximum of +40 °C.

Technical specification

SR 345, SR 346

Weight SR 345	≈ 200 g
Weight SR 346	≈ 410 g
Service temperature	-10 – +55 °C, < 90 % RH
Storage temperature	-20 – +40 °C, < 90 % RH
Resistance to chemicals	Requisition list from Sundström Safety AB
Approval	CE Category 1 UKCA Category 1

- A. Hood
- B. Visor
- C. Half mask
- D. Filter combination
- E. Exhalation valve (two)

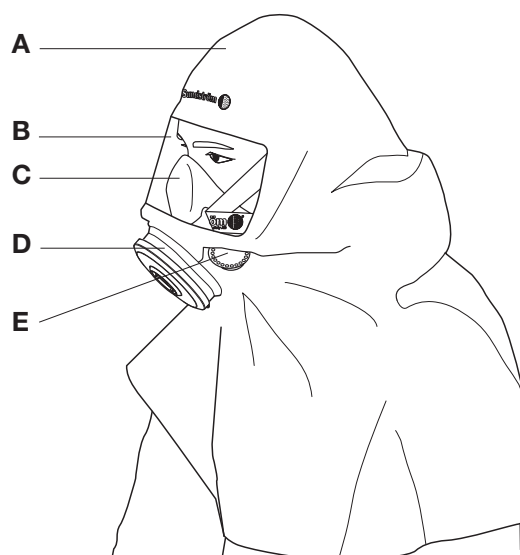

SR 345



Sundström Safety AB
Tel: +46 10 484 87 00
Västergatan 4
SE-341 50 Lagan

Sundström
www.srsafety.com